

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

## Theurl CLTPLUS

according to the product specification listed in the current addendum to this certificate placed on the market by

### Company

**THEURL HOLZ STEINFELD GMBH**

**Industriezone 1**

**AT-9754 Steinfeld**

and produced in the manufacturing plant

**AT-9754 Steinfeld, Industriezone 1**

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in

**ETA-20/0843, issued on 15.07.2025**

and

**EAD 130005-00-0304**

under system 1 for the performance set out in the ETA are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

## CERTIFICATE OF CONSTANCY OF PERFORMANCE


**Certificate number:** 1359-CPR-0810

**Date of first issue:** 01.12.2020

**Date of issuance:** 31.07.2025


This certificate will remain valid as long as neither the ETA, the EAD, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

For the validity of this certificate see [www.holzforchung.at](http://www.holzforchung.at).



**Dr. Andreas Neumüller**

Authorised signatory

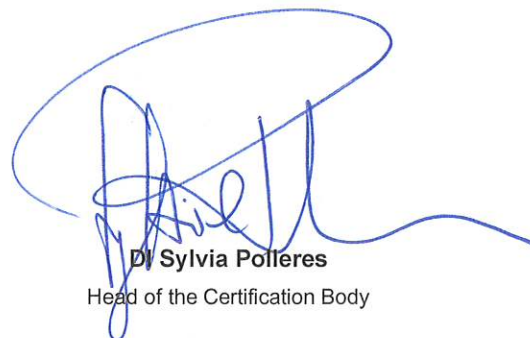

**DI Sylvia Polleres**

Head of the Certification Body

## **Addendum to certificate 1359-CPR-0810**

Date of issuance: 31.07.2025

### **Scope of certification:**

#### **Theurl CLTPLUS**

#### **Solid wood slab elements to be used as structural elements in building**

Structure:	at least 3 layers, 90 ° locked glued, up to max. 9 layers, symmetrical structure
Strength classes of the laminations:	C 24
Thickness:	60 - 320 mm
Width x length:	max. 3,5 x 16,0 m
Classes of utilisation:	1, 2
Wood species:	PCAB – spruce/ ABAL – fir
Adhesive – Finger joints:	Type I: PUR according to EN 15425
Adhesive – Surface bonding:	Type I: PUR according to EN 15425